

# Damping of Sub Synchronous Resonance Using Neural Network Controlled UPFC

K.Dhivya<sup>1</sup>, S.Nirmal rajan<sup>2</sup>

<sup>1</sup>.(PG scholar, M.E(power systems engineering) ,priyadarshini engineering college, vaniyambadi)

<sup>2</sup>.(Ass. professor of EEE department, priyadarshini engineering college, vaniyambadi)

## Abstract:

The increase in power demand has compelled the power system utilities to use series capacitive compensation in long transmission lines. A problem called sub synchronous resonance (SSR) occurs in long lines because of series compensation. In this paper a flexible a.c. transmission system (FACTS) device is used along with a proposed controller to damp out the sub synchronous oscillations from the system. An IEEE second bench mark model is used for investigating the SSR problem, where a three phase short circuit fault is applied on the compensated transmission line for analysis. A Matlab/Simulink model is used to study the time domain analysis of the system. An improvement in damping is seen with the use of FACTS device i.e. unified power flow controller (UPFC) which is controlled by a Neural network (NN) based proportional integral (PI) controller

**Keywords** — flexible AC transmission system(FACTS); Neural Network(NN); proportional Integral(PI); subsynchronous resonance(SSR); Unified power flow controller(UPFC).

## I. INTRODUCTION


The power consumption by the utility is subsequently increasing day by day. The increase in power demand had compelled the power engineers to use long transmission line which enables bulk power transfer. In order to satisfy the load demand in long transmission lines, series capacitive compensation is being used which increases the power delivering capability of the transmission line effectively. Further, it also improves the transient stability of the system [1]. Because of series capacitive compensation the problem of sub synchronous resonance (SSR) may occur in long transmission lines. The SSR problem relates to the torsional interactions between the generator rotor section and turbine section of the plant. The interactions between these two masses are caused due to sub harmonic frequencies produced by the series capacitive compensator [2]. These interaction causes shaft failure in the turbo-generator system. This phenomenon was first experienced in the year of 1937 but it got noticed in the 1970s after two turbine-generator shaft failures occurred at the Mojave generating station in Southern Nevada [3]. The SSR problem is further divided in two categories namely, torque amplification (TA) also known as transient torque and steady state SSR. The steady state SSR is further divided to torque interaction (TI) and induction generator effect (IEG) [4]. In this paper TI problem is taken into consideration which bears a threat to power system. A flexible a.c. transmission system (FACTS) is used in power system to improve power quality, power security and its integration. The FACTS devices have several uses in the power system but mainly they are used for reactive and real

power compensation, to improve power system stability (both transient and steady state), to control the line impedance, to suppress the harmonics, to improve the power factor of the system and even to mitigate the SSR problem. To suppress the sub harmonic oscillations there are many FACTS devices like static synchronous compensator (STATCOM), static voltage compensator (SVC), static series synchronous compensator (SSSC), unified power flow controller (UPFC) and thyristor controlled series compensator (TCSC) that can be used in the system [5]. This paper uses UPFC as a FACTS device for eliminating the SSR problem from the system due to the several advantages of UPFC over other FACTS devices. For achieving robust control over the UPFC a neural network (NN) based proportional integral (PI) controller has been used. The use of UPFC device along with NN based PI enhances the dynamic controllability in the power system. The NN based PI scheme is preferred over other controlling devices for its various advantages like robustness, less computational time and decreased space requirement. Moreover, it eliminates the need of mathematical model requirement of the system and also works for non linear system which makes it unique as compared to other controllers. In this paper an IEEE second bench mark simulink model is used to analyze the SSR problem. The UPFC is connected to the system along with NN based PI controller in order to mitigate the SSR problem from the system. The system under study is series capacitive compensated and a three phase fault is applied on it for analysis purpose. The analysis is carried on system parameters like generator speed deviation, torque deviation and turbine speed deviation and it can be observed from the parameters that oscillations are getting damped after the use of these



## II. SYSTEM UNDER STUDY

An IEEE second bench mark model for computer simulation

of sub synchronous resonance has been used for the study of the SSR and its mitigation [6]. This model is mostly used for the analysis of torque amplification in series compensated power system after a fault is applied. The power system model

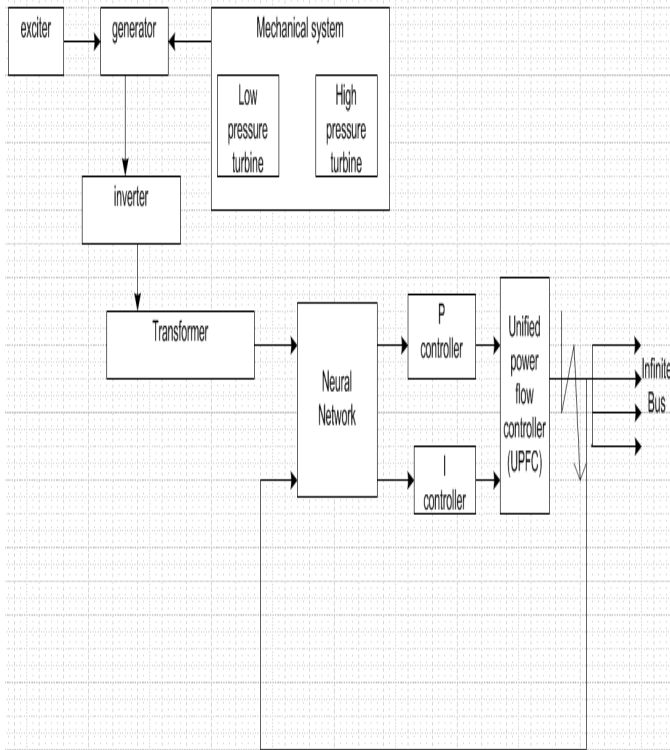

consists of a thermal generating unit connected with the infinite bus. Two transmission lines are used for connecting generator with the infinite bus out of which one is 55% series compensated. It also has a mechanical system consisting of turbine system having two mass and governor block. The two masses of turbine system are low pressure (LP)

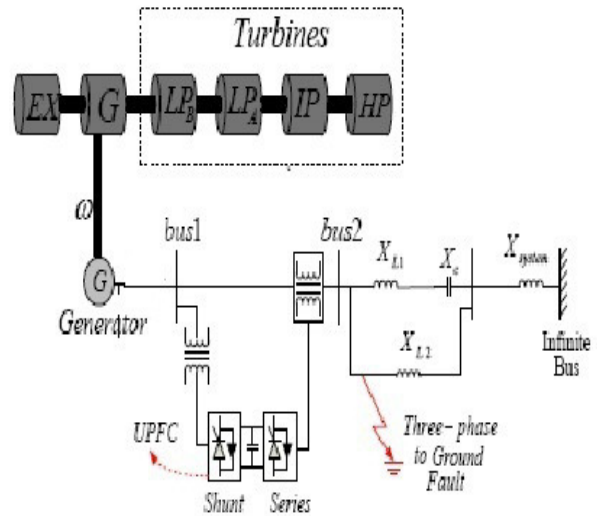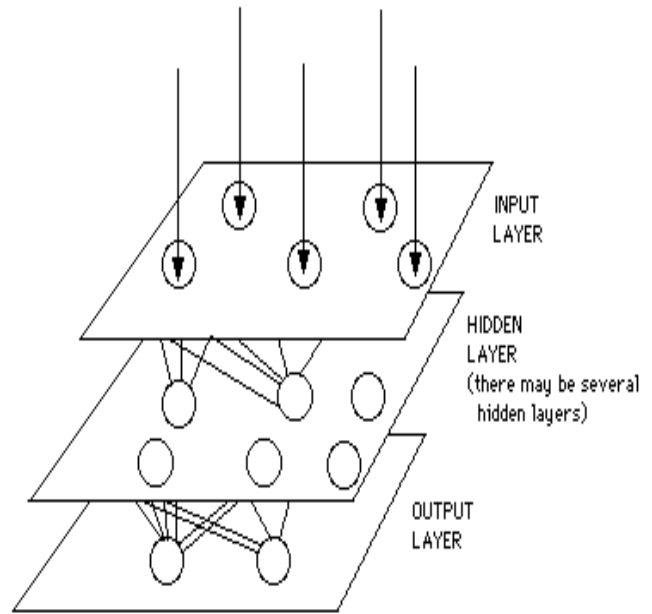

turbine and high pressure (HP) turbine. The SSR problem occurs in this system as it is series compensated. A three phase fault is applied and cleared to excite the torsional oscillation in the two mass shaft system. It can be observed that these induced oscillations produce the torque amplification in the system and thus causing SSR problem.

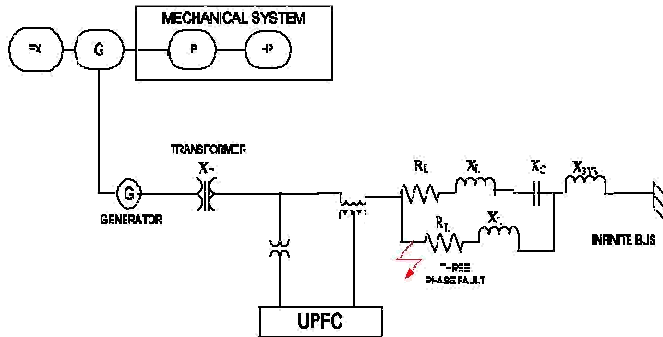


Fig. 1. System under study

The use of fuzzy logic scheme eliminated the requirement of mathematical modeling of the system and linearization of power system. So the system parameters are modeled by using non linear equations.

### III. SUB SYNCHRONOUS RESONANCE

The sub synchronous resonance phenomenon is mostly observed in series capacitive compensated power system network. The series compensation of long transmission line results in excitation of SSR current in the system at electrical frequency  $f_e$  is given by equation (1):

Where,

- $f_e$  = Electrical resonant frequency
- $f_s$  = Fundamental system frequency
- $x_c$  = Series capacitor reactance

$x_t$  = Total reactance of the line (including transformer leakage reactance and generator reactance)

The SSR phenomenon deals with the sustained oscillation caused below the system frequency. The danger of SSR is found when the long transmission lines are series compensated. In this phenomenon the electromagnetic forces in the generator caused by the SSR current produces a torque oscillations which interacts with the mechanical shafts of turbine section [7]. The interaction between these two systems results in mechanical shaft failure.

There exists a sub harmonic frequency in the system caused by the SSR phenomenon denoted by  $f_r$  and is given by equation (2):



block diagram of FLC is shown in Fig. 3 [9].

NNC is that it can work on non linear system. The linearized output obtained from the NNC set as input for block too.

Where

$f_{sub}$  = Subsynchronous frequency component

The value of electrical resonant frequency is always less as compared with the fundamental system frequency. The electrical circuit parameters start oscillating when the system under study is subjected to fault. The series compensated long transmission line having sub harmonic current generates a field at sub harmonic frequency. The sub harmonic field rotates backward as compared to main field and a torque is produced at frequency  $f_{sub}$ . If the sub synchronous frequency component  $f_{sub}$  matches with any one of the torsional frequencies of the mechanical mass system then a resonance condition occurs and energy is transferred between the two systems. This exchange of energy excites the torsional oscillations between the systems and it damages the shaft of the

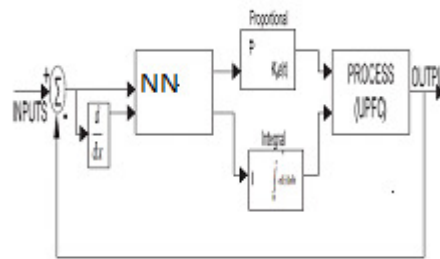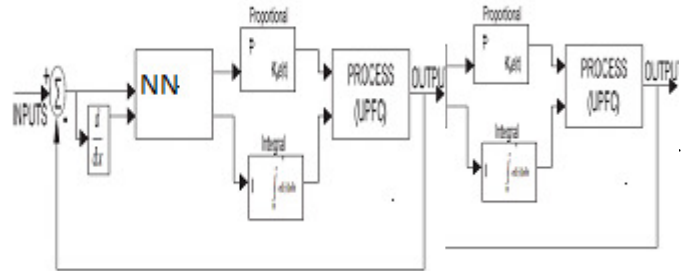

Block diagram of FL based PI controller

he parameter to be controlled becomes input to the FLC. The logical

the PI controller. This type of hybrid controller is used when both the operating conditions and system dynamics are know and where a single linear time invariant model is insufficient. In case of conventional the gain constants  $k_p$  and  $k_i$  are constant but in case of NN based PI the gain constants vary dynamically. This type of controller increases the robustness in the controlling system. The PI controller indeed becomes self tuned [10]. There are two inputs for the neural system and one output from it. The output is directly given to proportional block and the same is fed to integral

the gain constants  $k_p$  and  $k_i$  are constant but in case of NN based PI the gain constants vary dynamically. This type of controller increases the robustness in the controlling system. The PI controller indeed becomes self tuned [10]. There are two inputs for the neural system and one output from it. The output is directly given to proportional block and the same is fed to integral block too. In this paper the two inputs to the NNC are speed deviation ( $\Delta\omega$ ) and its derivative ( $\frac{d\Delta\omega}{dt}$ ). The input membership functions are designed using triangular shaped member functions (tri). The single output of the NNC is denoted by  $U$  and the output member function is designed by triangular shaped member function (tri). The corresponding membership functions are shown in Fig. 4. The neural set used is defined in Table 1 and Table 2. The surface plot of the NNC is shown in Fig. 5.

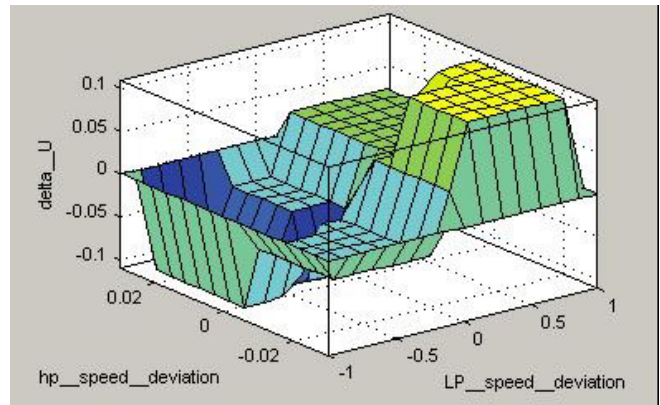
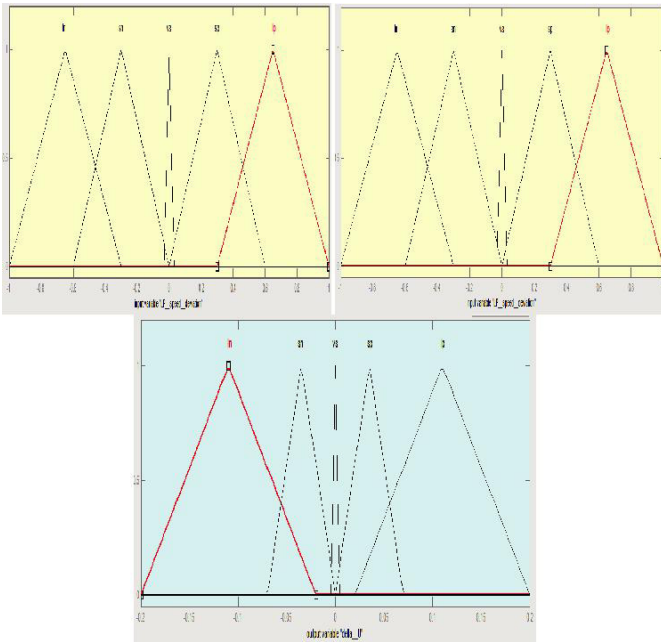


Fig. 5. Surface plot of FLC

### V. UNIFIED POWER FLOW CONTROLLER (UPFC)

The unified power flow controller is a unique and versatile flexible a.c. transmission system device which uses power electronics device to control the flow of power. The UPFC deals with both active power and reactive power. It consists of both series compensator like static synchronous series compensator (SSSC) and shunt compensator like static synchronous compensator (STATCOM) along with a d.c. link. Here the d.c. link is a capacitor [11]. It also consists of two voltage source converters (VSC) connected along the secondary side of both series transformer and shunt transformer respectively [12]. The d.c. capacitor is connected between the two voltage source converters. The block diagram of UPFC is shown in the Fig. 6.

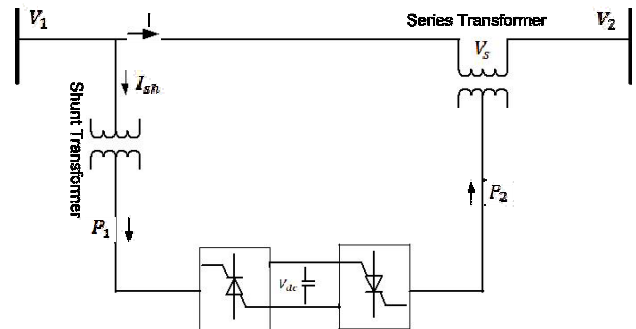


Fig. 4. Input and output membership functions

TABLE I. FUZZY SET

i	h				
	LN	SN	VS	SP	LP
LN	SN	SN	LN	LN	LN
SN	SN	SN	SN	LN	SN
VS	SP	SP	VS	SN	SN
SP	LP	SP	SP	SP	SP
LP	LP	LP	LP	SP	SP

TABLE II. ABBREVIATION OF LINGUISTIC VARIABLES USED IN FUZZY KNOWLEDGE BASE.

LN	Large negative
SN	Small negative
VS	Very small
SP	Small positive
LP	Large positive




Fig. 6. Circuit diagram of UPFC

The UPFC has combined advantages of both series converter (SSSC) and shunt converter (STATCOM). The active power can be transferred via d.c. link from shunt converter to series converter. In case of SSSC the injected voltage is always in quadrature with the line current but in case of UPFC the phase angle of the injected voltage is independent of the line current. By changing the phase angle and magnitude of the injected voltage one can control both active power and reactive power. In order to have additional control over the active and reactive power the shunt converter operates to control the voltage  $V_1$  by generating or absorbing the reactive power [13]. The common capacitor connected in between two VSCs acts like a d.c. voltage source. The VSC uses forced commutation power electronics devices to obtain a desired voltage from the d.c. voltage source.

## VI. SIMULATION RESULTS

The results obtained after using UPFC along with NN based PI controller has shown improved performance as compared with system having un controlled UPFC. The analysis for the suppression of sub harmonic frequency is carried out by observing the waveforms of generator speed deviation, LP-HP speed deviation, rotor speed deviation and LP-HP torque deviation. The use of NN based PI has shown better results in case of speed deviation in generator, LP turbine and HP turbine by damping the oscillations and decreasing the settling time and is shown in Fig. 7 to Fig. 9. The improvement in rotor speed is also prominent as the value tends to 1 p.u. and is shown in Fig. 10. In case of torque deviation in LP turbine and HP turbine the damping and settling time has decreased considerably and is shown in Fig. 11 and Fig. 12 respectively.

### OLTC (REAL AND REACTIVE POWER )

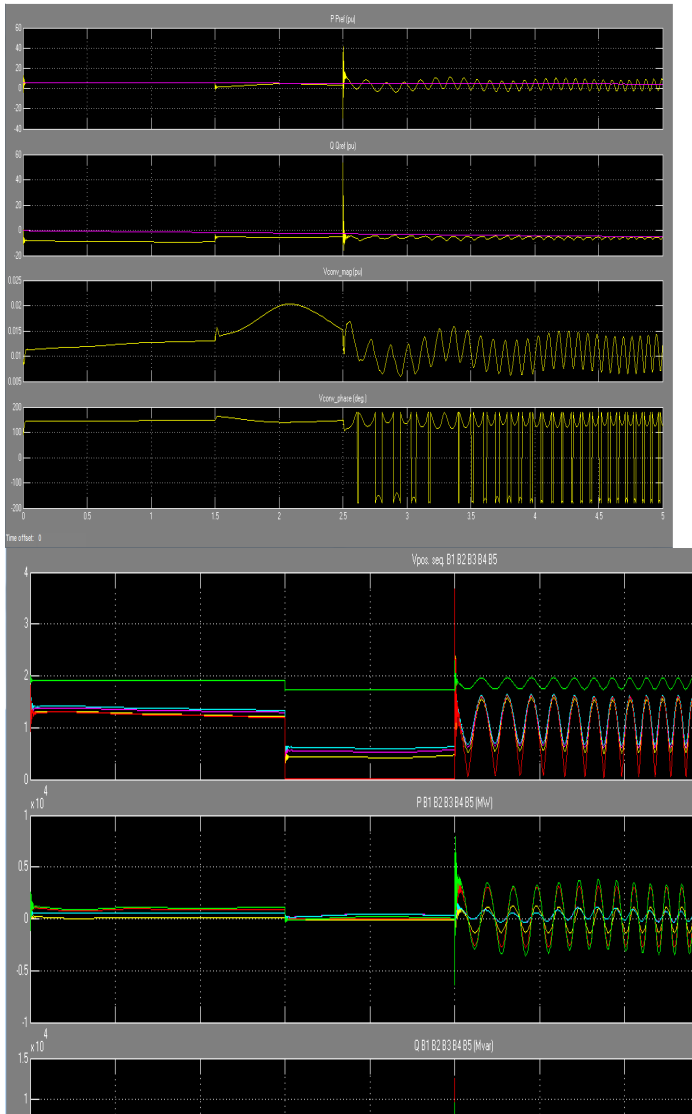



## VII. CONCLUSION

The UPFC controlled by NN based PI controller is used for mitigation of SSR problem from the single machine infinite bus system after the application of three phase fault. The use of UPFC along with NN based PI, provides better results in minimizing torque deviation and speed deviation by increasing the damping and decreasing the steady state error both in case of generator and LP-HP turbines. Further, it is observed that generator speed reaches the rated speed i.e. 1 p.u. in less time with the use NN based PI controller. With the proposed FL based PI supplementary control signal for UPFC it has been analyzed that the SSR problem is mitigated from the power system.

## ACKNOWLEDEMENT:



He received B.E(EEE) from priyadarshini engineering college affiliated to anna university Chennai, india in 2006, M.E(Power systems ) from adhiyamaan college of engineering in the year of 2012. He is working as assistant professor in priyadarshini engineering college, india. He has more than 2 years teaching experience and 5 years industrial experience. His area of interest includes power systems, electrical machines and power electronics and renewable energy sources.



I was completed B.E degree from the department of (EEE), SKP engineering college, anna university, Chennai ,india in 2013. I am currently doing my master degree of power system engineering in department of EEE from priyadarshini engineering college, Chennai, india. My current interest include

power system, power quality. Renewable energy sources..

## REFERENCES

- [1] Hossein Ali Mohammadpour, Seyyed Mohammad Hosein Mirhoseini, and Abbas Shoulaie, "Comparative study of proportional and TS fuzzy controlled GCSC for SSR mitigation," *POWERENG International Conference on Power Engineering, Energy and Electric Drives, Lisbon, Portugal*, pp. 564-569, March 18-20, 2009.
- [2] Massimo Bongiorno, Jan Svensson, and Lennart Ångquist, "On control of static synchronous series compensator for SSR mitigation," *IEEE Trans. Power Electronics*, vol. 23, no. 2, pp. 735-743, March 2008.
- [2] Massimo Bongiorno, Lennart Angquist, and Jan Svensson, "A novel control strategy for subsynchronous resonance mitigation using SSSC," *IEEE Trans. Power Delivery*, vol. 23, no. 2, pp. 1033-1041, April 2008.
- [3] Akbar Lak, Daryoush Nazarpour, and Hasan Ghahramani, "Novel methods with fuzzy logic and ANFIS controller based SVC for damping sub-synchronous resonance and low-frequency power oscillation," *20th Iranian Conference on Electrical Engineering, (ICEE2012), Tehran, Iran*, pp. 450-455, May 15-17, 2012.
- [4] Narendra Kumar, Sanjiv Kumar and Vipin Jain, "Damping subsynchronous oscillations in power system using shunt and series connected FACTS controllers," *International Conference on Power, Control and Embedded System, Allahabad, India*, pp. 1-5, 29<sup>th</sup> Nov – 1<sup>st</sup> Dec, 2010.
- [5] IEEE Subsynchronous resonance working group, "Second benchmark model for computer simulation of subsynchronous resonance," *IEEE Trans. Power Apparatus and Systems*, vol. 104, no. 5, pp. 1057-1066, 1985.
- [6] Rakesh Das Begamudre, *Extra high voltage AC transmission engineering, Second Edition, New Age International (P) Limited, Publishers, October 1997.*
- [7] V. Shanmugasundaram, T. Jayabarathi, "A fuzzy approach of autonomous power generating systems," *Procedia Engineering*, vol. 38, pp. 753-762, 2012.
- [8] S. T. Nagarajan and Narendra Kumar, "Fuzzy logic

*based control of STATCOM for mitigation of SSR,” 5<sup>th</sup> Indian International Conference on Power Electronics (IICPE), Delhi, pp. 1-6, 6-8 Dec., 2012.*

[9] *I. J. Nagarath, M. Gopal, Control System Engineering, 3rd edition, New Age International Publications, New Delhi, India, 1999.*

[10] *Yasser M. Alharbi, A. Abu Siada, A. F. Abdou, “Application of UPFC on stabilizing torsional oscillations and improving transient stability,” Australasian Universities Power Engineering Conference, Hobart, Australia, pp. 1-4, 29th Sept – 3rd Oct, 2013.*

[11] *Hossein Hosseini, Aref boudaghi, Ali Mehri, S.Farid Torabi, Hadi Farshbar, “Mitigating SSR in hybrid system with steam and wind turbine by UPFC,” Proceedings of 17<sup>th</sup> Conference on Electrical Power Distribution Network, Tehran, pp. 1-6, 2-3 May, 2012.*

[12] *Narain G. Hingorani and Laszlo Gyugyi, Understanding FACTS concepts and technology of flexible ac transmission systems, IEEE press, Standard publishers distributors, New Delhi, 2001.*